

Hygger Cross Flow Wave Maker HG070-12W



Price: R2,177.00

Description

HG070-12W

Flow Rate: 5000L

Recommended tank size: $\leq 227L$

Recommended glass thickness: $\leq 8mm$

5 Wave Modes

Feed Mode

Night Mode

Hygger Cross Flow Wave Maker generates soft waves and the waves are spread 360 degrees for freshwater and reef aquariums. Hygger Cross Flow Wave Makers, creates a water flow similar to ocean activates and helps to eliminates dead spots.

As a powerful wave pump, it has 5 wave modes available – pulse wave, sine wave, constant wave, random wave, and cross flow wave; 3 working modes: feeding mode, night mode, and linkage mode. Additionally, the pump has various options for your aquariums including 1-100 flow rate levels and 1-100 frequency levels.

Super Silent Wave Maker

By using the sine wave control technology, the Hygger Cross Flow Wave Maker transport circulating water with almost no sound heard during the operation. Its rotatable head generates waves from multiple directions, making it perfect for creating a natural environment for aquatic organisms quietly.

Directions for Use

How to set the FEED mode with a cross-flow wave pump?

1. Long press the “OFF/FEED” button, and the display shows “Fd10”, and the wave pump stops working, it is convenient for fish to feed.
2. After 10 minutes, the wave pump automatically enters the mode before feeding to start working.
3. If you need to return to work during feeding, long press the “OFF/FEED” button.

How to set the NIGHT mode on the wave pump?

1. Long press the “Wi-Le/NIGHT” button to achieve day and night waves. When the controller is in a dark environment, the wave pump will automatically switch to constant wave mode with a minimum flow rate.
2. Long press again to exit night mode.

Intelligent LED Controller

You can set the Hygger Cross Flow Wave Maker to different modes to simulate natural ocean waves with the intelligent LED controller.

Product Gallery




Controller Panel



Diagram of 5 wave mode

- 1 Wi-Le/NIGHT**
 Short press to select master, slave and independent control, long press to enter night mode.
Master control: The master controller can perform all function operations.
Slave control: The slave controller can only adjust the flow rate, other operations are invalid.
- 2 MODE/FREQ**
 Short press to select mode, long press to display the frequency, you can adjust the frequency by "+" and "-".
- 3 OFF/FEED Button**
 Short press to turn the pump on and off, long press to enter feeding mode.
- 4 Speed Adjust Button**
 Press to adjust the flow rate and frequency, add 1 level for each press.
- 5 Lock Mode Indicator**
 Press and hold the "+" and "-" button until the lock indicator appears in the screen, indicating that the controller is locked. To unlock, press and hold the "+" and "-" button until the lock disappears.

Product Parameters

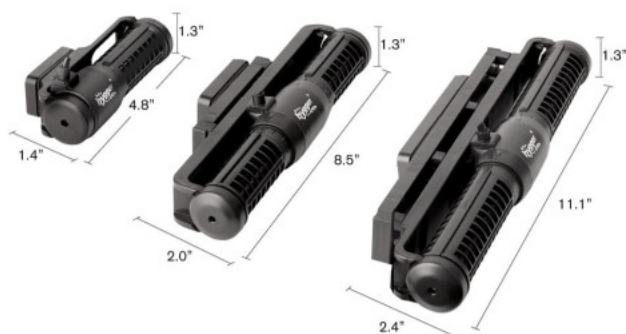

Model	HG070-12W	HG070-18W	HG070-25W
Voltage	Input: AC100-240V 50/60Hz Output: DC24V		
Flow Rate	1321GPH(5000L)	1850GPH(7000L)	2380GPH(9000L)
Recommend tank size	≤60CM (60Gal)	≤80CM (135Gal)	≤100CM (265Gal)
Recommend glass thickness	≤0.315" (8MM)	≤0.39" (10MM)	≤0.47" (15MM)